

# Proximity Card Reader



PP-510

## Introduction

PP-510 is a proximity reader which reads 125KHz EM, 13.56MHz Mifare contactless card/keytag etc., and then send out complete ID via TCP/IP for data collection. This product supplies two LED as indicators of power and data transmission.

## Specifications


RFID frequency	: 125KHz EM / 13.56MHz Mifare
Applicable cards	: EM4001, EM4002, EM4200) Mifare S50, S70
Output Interface	: TCP/IP
Power input	: DC 12V
Standby current	: 170mA±10% @ 12V DC
Operating current	: 170mA±10% @ 12V DC
Material	: PVC

## Ordering information

**PP-510NT3D05** :125KHz EM Proximity Card Reader, TCP/IP

**PP-510M0T3H01** :13.56MHz Mifare Proximity Card Reader, TCP/IP

Mifare is a registered trademark of NXP B.V.

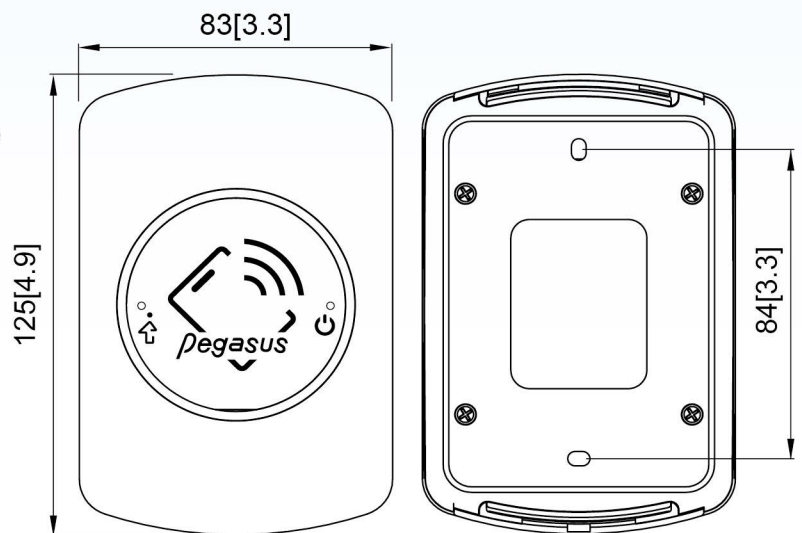

Unit: mm[inch]

## PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan

Tel : 886-2-82280198

Fax : 886-2-82280191

E-mail : [pongee@pongee.com.tw](mailto:pongee@pongee.com.tw)

Website:<http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!

20191206