


Touch Key Access Controller




PP-33

Features

- The back light can be set to Normal ON, Normal OFF or Automatic mode.
- Security function to activate or deactivate all or selected sensors.
- Support fire alarm signal to release the door automatically.
- Not compare and add card by reading.
- Switching on alarm automatically, if failed input password for three times and warning management to avoid illegal entrance.
- Relay supported with shockproof, to avoid illegal open door entrance.
- Up to 90 codes 4 digits door PIN.
- Setting door monitoring time becomes second unit or minute unit. Up to 98 minutes.
- Setting door release time becomes second unit or minute unit. Up to 97minutes.
- Excellent multiple operation modes :(1) Card only (2) Card + PIN (3)Door PIN only (4)Card Number+PIN (5)Free access (6) Automatic operation mode by time zones.
- All operation modes with PIN are supported by selectable duress function. Also, keypad is lockable to become dumb.
- Supports 8/24/48/64/96 floors lift access control.
- Group function by pressing password.
- Full APB (anti-passback), time zone.

Specification

- RFID frequency : 125KHz / 13.56MHz
- Output interface : RS-485 / RS-232
- Card capacity / Events : 32,000 /32,000
- External reader : Wiegand 26 /34(35/37/40)bits
- Input : Exit push button / Door Monitor / Security sensor
- Output : Security sensor / tamper switch output / Electric lock output
- Material : PC

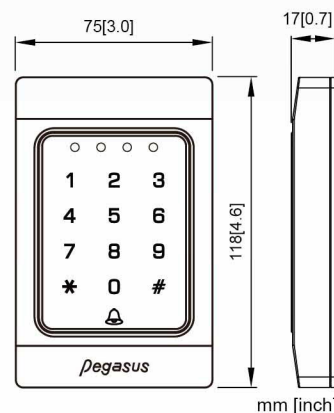

Personal access control



Lifts access control



Management system for locker or mail box

Ordering information

- PP-33XNB** : 125KHz EM Access controller & reader, 32000 users, 32000 events, RS485 & RS-232
- PP-33XNR5B** : 125KHz EM Access controller & reader, 32000 users, 32000 events, RS485
- PP-33XM0B** : 13.56MHz Mifare Access controller & reader, 32000 users, 32000 events, RS485 & RS-232
- PP-33XM0R5B**: 13.56MHz Mifare Access controller & reader, 32000 users, 32000 events, RS485

PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan

Tel : 886-2-82280198

Fax : 886-2-82280191

E-mail : pongee@pongee.com.tw

Website: <http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!



FM 39868



20200218